

# NURSE CALL CABLE



**Supercomal Group**  
**Supercomal Advanced Cables SDN. BHD.**  
**(SAC) (405437-H)** (A Subsidiary of Supercomal Technologies BHD.)

Lot 171, Jalan PKNK 3/8, Kawasan Perusahaan Sungai Petani,  
08000 Sungai Petani, Kedah D.A., Malaysia

Tel: (60-4) 441-1822 (hotline) Fax: (60-4) 441-1755

Homepage: [www.supercomal.com.my](http://www.supercomal.com.my)

E-Mail: [sales@supercomal.com.my](mailto:sales@supercomal.com.my)

Designer: Jerry Shiue




## Features :

- Stranded tinned annealed conductor.
- Two-conductor Semi-Rigid P.V.C insulated.
- Foil Paper tape with filler.
- Retractable cable keep from tangling and cluttering.
- Colour-coded PVC jacketed.
- Rating temperature : 60°C
- Rating voltage : 300V

## Application :

- For external wiring of electronic equipment..

## Construction and Characteristics :

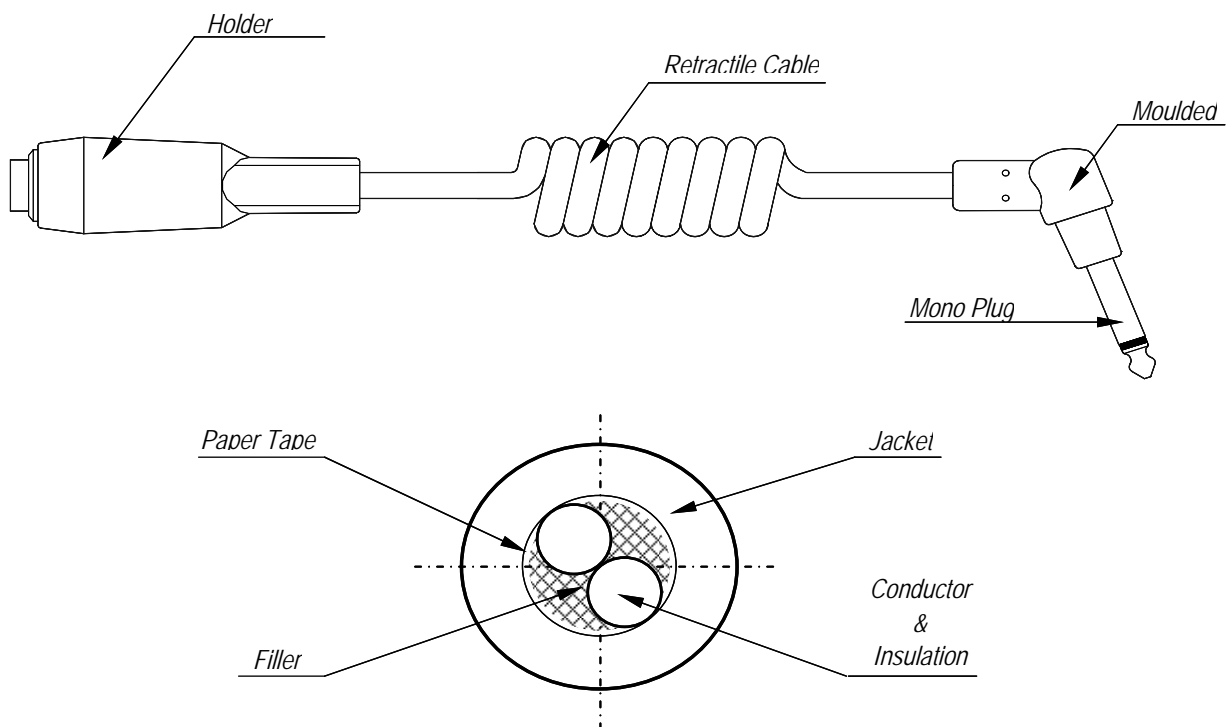

Conductor			Insulation					Jacket		Max. cond resistance 25°C (Ω/km)	Min. ins. resistance 20°C (MΩ/km)	Dielectric withstand voltage (AC/1 min)	Packing Length per roll
Type	Size (AWG)	Strand (No/mm)	Strand O.D (mm)	Thickness Average (mm)	Nom. O.D. (mm)	No. of core	Strand O.D (mm)	Thickness Average (mm)	Nom. O.D. (mm)				
Stranded tinned copper	22	26/0.127	0.75	0.38	1.60	2	3.20	1.50	6.50	56.1	5	1500	1000Ft (305M)